

EMVA 1288 IMAGING PERFORMANCE


FLIR BLACKFLY[®]S

BFS-U3-88S6

Measurements are taken based on guidelines in the EMVA 1288 standard; the full definition can be found at EMVA.org. Camera settings are: maximum bit depth, 16-bit pixel format, and ISP disabled. The center wavelength is 525 nm unless otherwise noted. Results are captured at room temperature (20°C). Using FLIR test software version 4.0.

	BFS-U3-88S6M	BFS-U3-88S6C
Resolution	4096 x 2160	4096 x 2160
Sensor	Sony IMX267, CMOS, 1"	Sony IMX267, CMOS, 1"
Pixel Size (µm)	3.45	3.45
Firmware	1801.0.243.0	1801.0.243.0
ADC	12-bit	12-bit
Quantum Efficiency Mono (% at 530 nm)	62	N/A
Quantum Efficiency Blue (% at 460 nm)	N/A	45
Quantum Efficiency Green (% at 530 nm)	N/A	56
Quantum Efficiency Red (% at 625 nm)	N/A	44
Temporal Dark Noise (Read Noise) (e-)	2.39	2.31
Temporal Dark Noise (Read Noise) (DN)	13.73	13.74
Signal to Noise Ratio Maximum (dB)	40.46	40.28
Signal to Noise Ratio Maximum (Bits)	6.72	6.69
Absolute Sensitivity Threshold (γ)	4.64	5.02
Absolute Sensitivity Threshold (e-)	2.89	2.81
Saturation Capacity (Well Depth) (e-)	11107	10659
Saturation Capacity (Well Depth) (γ)	17840	19036
Dynamic Range (dB)	71.69	71.57
Dynamic Range (Bits)	11.91	11.89
Gain (e-/ADU)	0.17	0.17

BFS-U3-88S6M

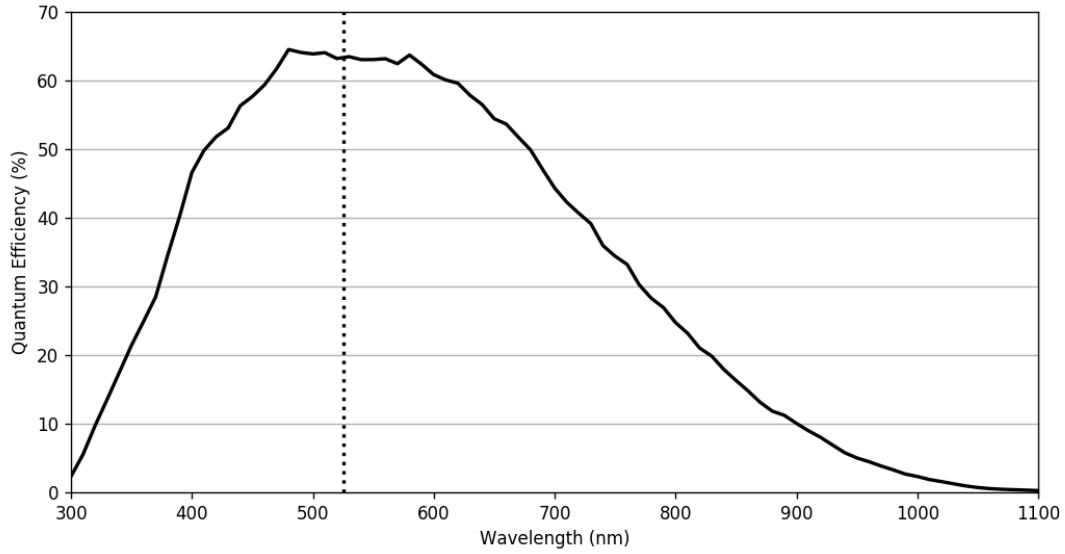

BFS-U3-88S6C

