


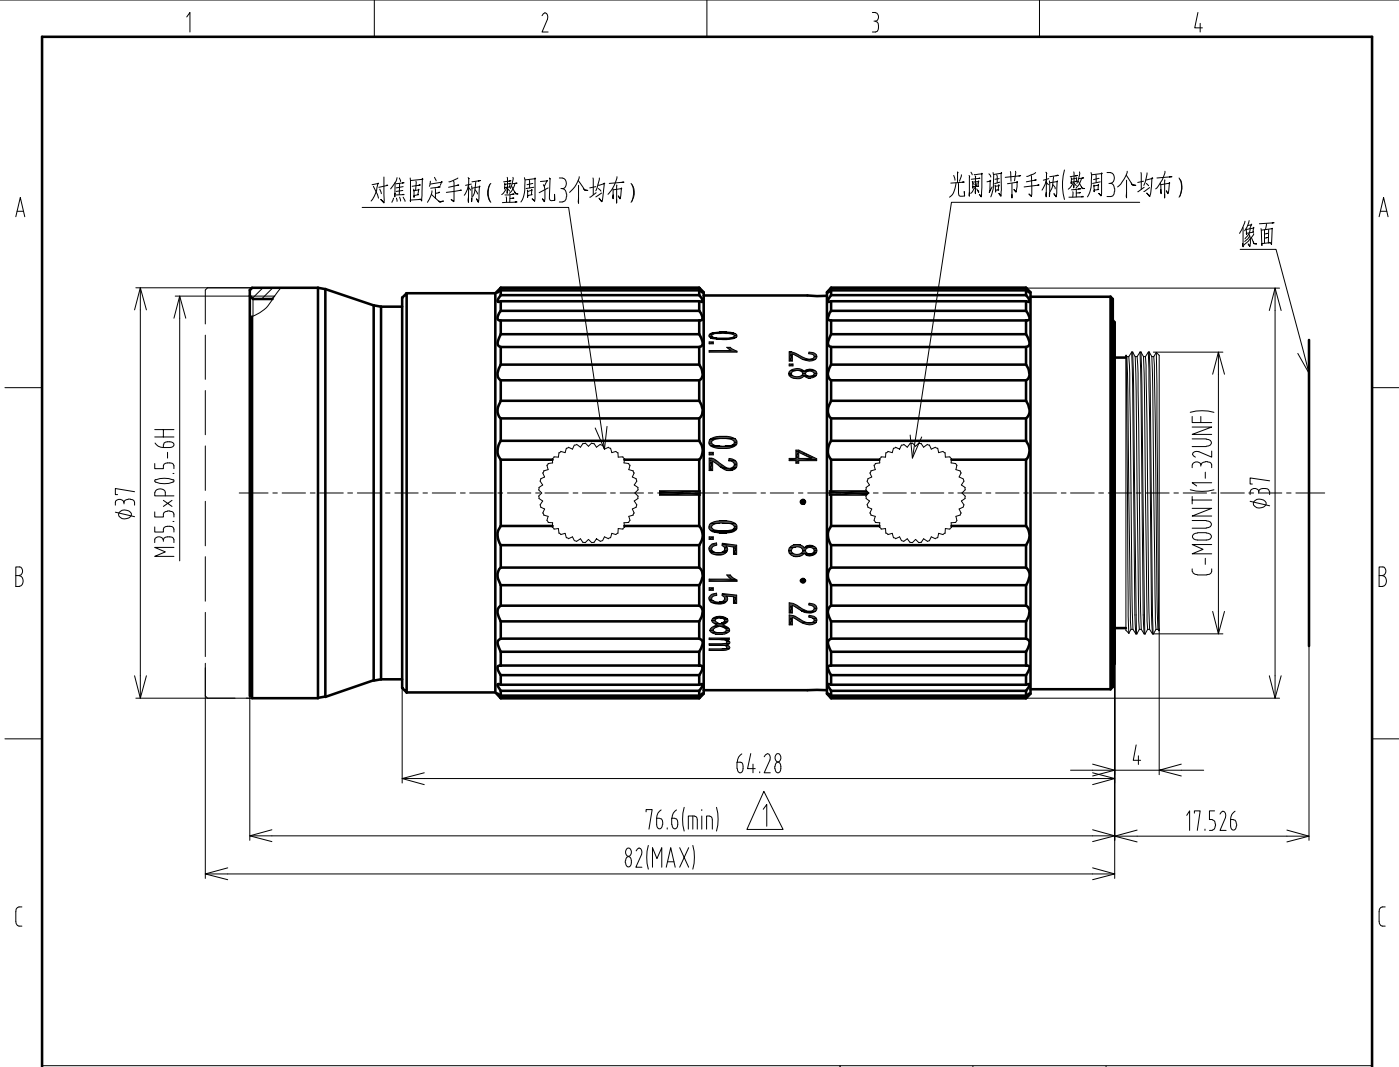

4/3" F2.8/25 C Mount					Working distance	Optical Magnification	4/3" Field of View(mm)		
Focal Length		f=25mm			mm		H	V	
D	Max Diameter (Ratio)	F=1:2.8~22			5000	0.005X	3441.1	2580.8	
	Picture Size	4/3"(17.6×13.2mm) 1"(12.8×9.6mm) 2/3"(8.8×6.6mm)			2000	0.013X	1384.5	1038.4	
	Angle	H	37.5°	27.6°	19.2°	1000	0.025X	698.8	524.1
		V	28.5°	20.9°	14.5°	900	0.028X	630.2	427.7
		D	45.9°	34.2°	23.9°	800	0.031X	561.6	421.2
	Object Dimension at 200mm	H	149.2mm	108.5mm	74.6mm	700	0.036X	493	369.8
		V	111.9mm	81.4mm	74.6mm	600	0.042X	424.4	318.3
		D	186.5mm	135.6mm	93.2mm	550	0.045X	390	292.5
	Distortion (TV)		<0.3%	<0.1%	<0.03%	500	0.050X	355.7	266.8
	Focus distance(min)		0.1m			450	0.055X	321.4	241.0
Flange back		17.526mm in air			400	0.061X	287	215.3	
E	Back focus		29.6mm(min)			350	0.070X	252.6	189.5
	Filter screw size		M35.5×P0.5			300	0.081X	218.2	163.7
	Front/Rear Effective Dia		Front φ28.4mm Rear φ19.2mm			250	0.096X	183.8	137.8
	Mount		C-Mount			200	0.118X	149.2	111.9
	Temperature Range		-10~+50℃			150	0.154X	114.6	86
F	Storage Temperature Range		-20~+60℃			100	0.221X	79.8	59.8
1		2		3		4			